

DESCRIPTION

The TopTier™ parking garage, canopy and low-bay luminaire is an innovative solution that delivers an unparalleled combination of performance and visual comfort. The patented WaveStream™ optical technology blocks the line of sight from the LED light sources to the observer, while extracting the maximum amount of light on task. This approach results in a high level of uniformity and vertical footcandles that enhances safety in the application environment. The TopTier luminaire is UL/cUL listed for wet locations, IP66 and 3G vibration rated.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

Construction

One-piece, low copper die-cast aluminum housing provides a clean and symmetric housing. Formed aluminum top is sloped to prevent bird nesting. Metal electrical tray allows for easy electrical access for field servicing.

Optics

Unique optical distributions are accomplished using various combinations of reflective backing plates and WaveStream optical technology. The optical Waveguide is manufactured using precision injection molded acrylic. The optics contain features that form a repeatable and redundant pattern to direct light in a precisely prescribed distribution. The drive lane distribution is specifically designed for locations with one direction of travel to optimally direct light in the same direction of travel for maximum glare control. For additional glare control and visual comfort with the Wide distribution, specify the SG option which adds a Solite® glass lens that works in combination with the Waveguide lens and reflective backing plate.

Offered standard in 4000K (+/- 275K) CCT, optional 3000K, 5000K and 6000K. Minimum 70 CRI. Optional uplight feature provides a dedicated light engine (17W) to maintain consistent output across fixtures and reduces cave effect. Nominal uplight output is 800 lumens and ranges from 10%-30% total light output depending on the lumen package.

Electrical

LED driver(s) are mounted to metal electrical tray for optimal thermal performance. 120-277V 50/60Hz, 347V 60Hz or 480V 60Hz operation. 480V is compatible for use with 480V Wye systems only. Standard with 0-10V dimming driver(s), specify 5LTD for Fifth Light DALI driver(s). Shipped standard with Eaton proprietary circuit module designed to withstand 10kV of transient line surge. Greater than 90% lumen maintenance expected at 60,000 hours, based off LM-80 test data and TM-21. Suitable for ambient temperature applications from -40°C (-40°F) to 40°C (104°F). For 50°C (122°F) applications, specify the HA high ambient option. IP66 rated against the ingress of dust and water.

Mounting

Standard fixture mounts to a square or octagonal 4" surface or recessed j-box via heavy-gauge quick mount bracket. Optional mounting methods include trunnion mount and wall mount. With the addition of a field supplied wet location j-box, the luminaire can be pendant mounted using the factory supplied decorative pendant mount kit or a suitable field supplied pendant.

Finish

Housing finished in white super durable TGIC polyester powder coat paint with 2.5 mil nominal thickness for superior protection against fade and wear. Optional colors include black, bronze, grey, dark platinum and graphite metallic. RAL and custom color matches available. Consult the McGraw-Edison Architectural Colors brochure for the complete selection.

Warranty

Five-year warranty.




TT TOPTIER LED

Solid State LED

PARKING GARAGE/
CANOPY/
LOW-BAY LUMINAIRE

DIMENSIONS

SURFACE OR PENDANT MOUNT

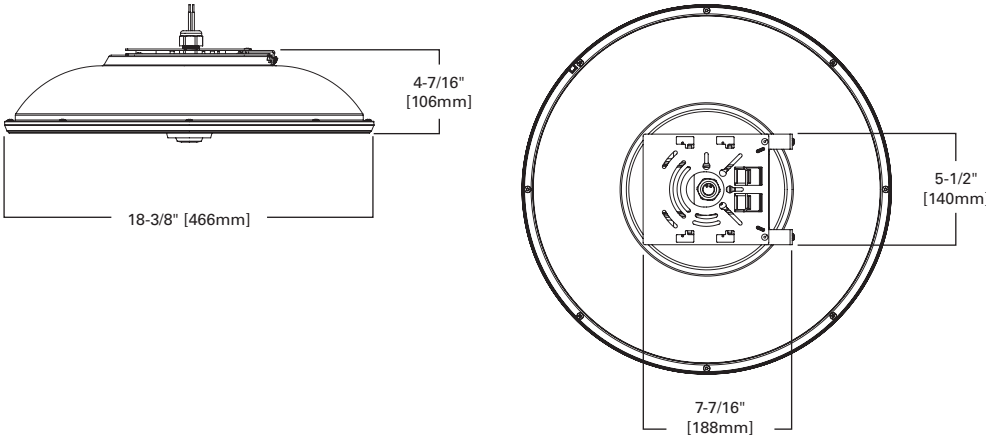

CERTIFICATION DATA

UL/cUL Wet Location Listed
3G Vibration Rated
LM79 / LM80 Compliant
IP66 Rated
ISO 9001
DesignLights Consortium™ Qualified*

ENERGY DATA


Electronic LED Driver
>0.9 Power Factor
<20% Total Harmonic Distortion
120-277V/50 & 60Hz, 347V/60Hz,
480V/60Hz
-40°C Min. Temperature
40°C Max. Temperature
50°C Max. Temperature (HA Option)

SHIPPING DATA


Approximate Net Weight:
16 lbs. (7.2 kgs.)

ADDITIONAL MOUNTING OPTIONS


TRUNNION MOUNT

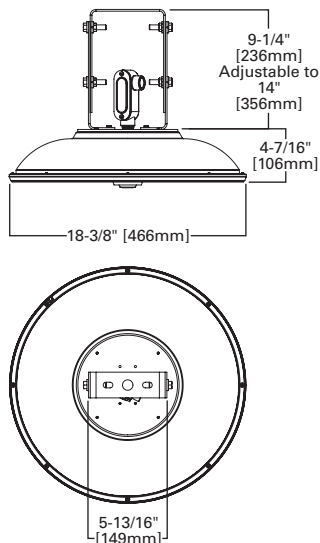


WALL MOUNT

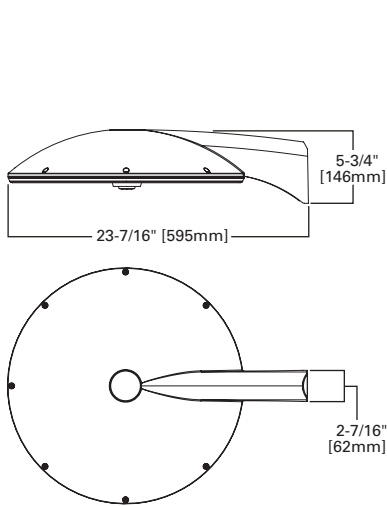

DECORATIVE PENDANT MOUNT

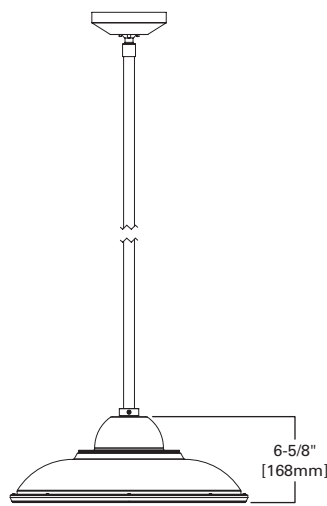

OPTICAL DISTRIBUTIONS

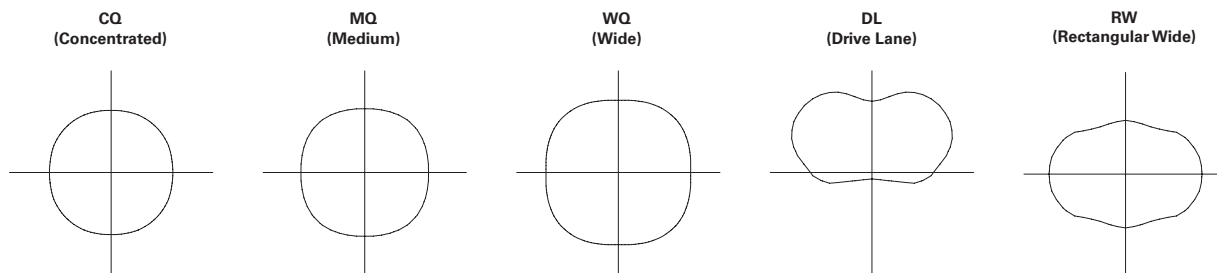

LUMEN MAINTENANCE

Ambient Temperature	Lumen Maintenance				
	25,000 Hours	50,000 Hours	60,000 Hours TM-21 Rating	100,000 Hours	Theoretical L70 (Hours) Per TM-21 Data
C1 Lumen Package					
25°C	> 96%	> 95%	> 95%	> 93%	> 500,000
40°C	> 96%	> 94%	> 94%	> 93%	> 500,000
50°C	> 95%	> 94%	> 93%	> 93%	> 400,000
C2 Lumen Package					
25°C	> 96%	> 95%	> 95%	> 93%	> 500,000
40°C	> 95%	> 94%	> 93%	> 91%	> 500,000
50°C	> 95%	> 93%	> 92%	> 90%	> 400,000
C3 Lumen Package					
25°C	> 96%	> 93%	> 93%	> 89%	> 300,000
40°C	> 95%	> 91%	> 90%	> 85%	> 240,000
50°C	> 95%	> 90%	> 89%	> 83%	> 200,000
C4 Lumen Package					
25°C	> 96%	> 95%	> 95%	> 93%	> 500,000
40°C	> 95%	> 92%	> 92%	> 88%	> 300,000
50°C	> 94%	> 91%	> 90%	> 85%	> 250,000
C5 Lumen Package					
25°C	> 96%	> 93%	> 92%	> 88%	> 300,000
40°C	> 94%	> 90%	> 89%	> 83%	> 200,000
C6 Lumen Package					
25°C	> 95%	> 92%	> 90%	> 86%	> 250,000
40°C	> 95%	> 92%	> 91%	> 86%	> 250,000

POWER AND LUMENS

Lumen Package		C1	C2	C3	C4	C5	C6	
Power (Wattage)		28	34	45	58	77	108	
Current @ 120V (A)		0.26	0.31	0.41	0.52	0.69	0.95	
Current @ 277V (A)		0.13	0.14	0.19	0.24	0.30	0.41	
3000K CCT	Lumens	CQ Concentrated	3,293	3,997	5,256	5,486	7,107	9,084
	Lumens per Watt		118	118	117	95	92	84
	BUG Rating		B1-U0-G1	B2-U0-G1	B2-U0-G1	B2-U0-G1	B2-U0-G1	B3-U0-G1
	Lumens	MQ Medium	3,357	4,074	5,357	5,591	7,243	9,259
	Lumens per Watt		120	120	119	96	94	86
	BUG Rating		B2-U0-G1	B2-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G2	B3-U0-G2
	Lumens	WQ Wide	3,101	3,764	4,949	5,165	6,691	8,554
	Lumens per Watt		111	111	110	89	87	79
	BUG Rating		B2-U0-G1	B2-U0-G2	B3-U0-G2	B3-U0-G2	B3-U0-G2	B3-U0-G3
	Lumens	RW Rectangular Wide	2,726	3,308	4,350	4,540	5,882	7,519
	Lumens per Watt		97	97	97	78	76	70
	BUG Rating		B2-U0-G1	B2-U0-G2	B3-U0-G2	B3-U0-G2	B3-U0-G2	B3-U0-G3
	Lumens	DL Drive Lane / Type 4	2,440	2,938	4,152	--	--	--
	Lumens per Watt		73	71	62	--	--	--
	BUG Rating		B1-U0-G2	B1-U0-G2	B2-U0-G3	--	--	--
4000K CCT	Lumens	CQ Concentrated	3,848	4,670	6,141	7,273	9,423	12,046
	Lumens per Watt		137	137	136	126	123	111
	BUG Rating		B2-U0-G1	B2-U0-G1	B2-U0-G1	B2-U0-G1	B3-U0-G1	B3-U0-G2
	Lumens	MQ Medium	3,922	4,760	6,259	7,413	9,604	12,277
	Lumens per Watt		140	140	139	128	125	114
	BUG Rating		B2-U0-G1	B2-U0-G2	B3-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3
	Lumens	WQ Wide	3,623	4,397	5,782	6,848	8,872	11,342
	Lumens per Watt		129	129	128	118	115	105
	BUG Rating		B2-U0-G2	B2-U0-G2	B3-U0-G2	B3-U0-G2	B3-U0-G3	B4-U0-G3
	Lumens	RW Rectangular Wide	3,185	3,865	5,082	6,019	7,799	9,969
	Lumens per Watt		114	114	113	104	101	92
	BUG Rating		B2-U0-G2	B2-U0-G2	B3-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3
	Lumens	DL Drive Lane / Type 4	3,235	3,895	5,506	--	--	--
	Lumens per Watt		98	95	83	--	--	--
	BUG Rating		B1-U0-G2	B1-U0-G2	B2-U0-G3	--	--	--
5000K CCT	Lumens	CQ Concentrated	3,645	4,424	5,817	7,204	9,334	11,932
	Lumens per Watt		130	130	130	124	121	110
	BUG Rating		B1-U0-G1	B2-U0-G1	B2-U0-G1	B2-U0-G1	B3-U0-G1	B3-U0-G2
	Lumens	MQ Medium	3,716	4,509	5,929	7,343	9,513	12,161
	Lumens per Watt		133	133	132	127	124	113
	BUG Rating		B2-U0-G1	B2-U0-G2	B3-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3
	Lumens	WQ Wide	3,433	4,166	5,478	6,783	8,788	11,235
	Lumens per Watt		123	123	122	117	114	104
	BUG Rating		B2-U0-G2	B2-U0-G2	B3-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3
	Lumens	RW Rectangular Wide	3,017	3,662	4,815	5,962	7,725	9,875
	Lumens per Watt		108	108	107	103	100	91
	BUG Rating		B2-U0-G2	B2-U0-G2	B3-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3
	Lumens	DL Drive Lane / Type 4	3,205	3,858	5,454	--	--	--
	Lumens per Watt		96	93	82	--	--	--
	BUG Rating		B1-U0-G2	B1-U0-G2	B2-U0-G3	--	--	--

NOTE: Nominal data with 70 CRI for 4000K and 5000K, 80 CRI for 3000K. Wattage values not valid for drive lane optic. For configurations that include the drive lane optic, glass, uplight or occupancy sensor options refer to the specific IES files for wattage, BUG rating and lumen output data.

CONTROL OPTIONS

0-10V

This fixture is offered standard with 0-10V dimming driver(s). External 0-10V dimming wire leads are provided for use with a lighting control panel or other control methods except when PER7, 5LTD, MS/DIM or LWR is specified.

Photocontrol (P, R and PER7)



Optional button-type photocontrol (P) and photocontrol receptacles (R and PER7) provide a flexible solution to enable “dusk-to-dawn” lighting by sensing light levels. Advanced control systems compatible with NEMA 7-pin standards can be utilized with the PER7 receptacle.

Dimming Occupancy Sensor (MS/DIM-LXX)

These sensors are factory installed in the luminaire housing. When the MS/DIM-LXX sensor option is selected, the occupancy sensor is connected to a dimming driver and the entire luminaire dims when there is no activity detected. When activity is detected, the luminaire returns to full light output. The MS/DIM sensor is factory preset to dim down to approximately 50 percent power with a time delay of five minutes.

These occupancy sensors include an integral photocell that can be activated with the FSIR-100 accessory for “dusk-to-dawn” control or daylight harvesting. The factory preset is OFF. The FSIR-100 is a wireless tool utilized for changing the dimming level, time delay, sensitivity and other parameters.



A variety of sensor lenses are available to optimize the coverage pattern for mounting heights from 8’-40’.

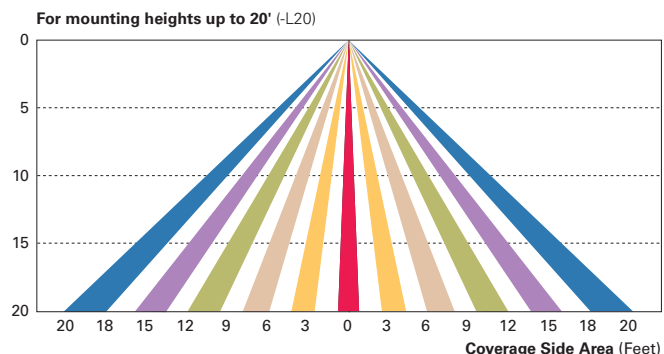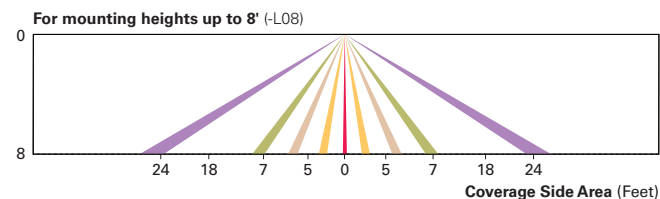

LumaWatt Pro Wireless Control and Monitoring System (LWR-LW and LWR-LN)

The LumaWatt Pro system is a peer-to-peer wireless network of luminaire-integral sensors for any sized project. Each sensor is capable of motion and photo sensing, metering power consumption and wireless communication. The end-user can securely create and manage sensor profiles with browser-based management software. The software will automatically broadcast to the sensors via wireless gateways for zone-based and individual luminaire control. The LumaWatt Pro software provides smart building solutions by utilizing the sensor to provide easy-to-use dashboard and analytic capabilities such as improved energy savings, traffic flow analysis, building management software integration and more.

For additional details, refer to the LumaWatt Pro product guides.

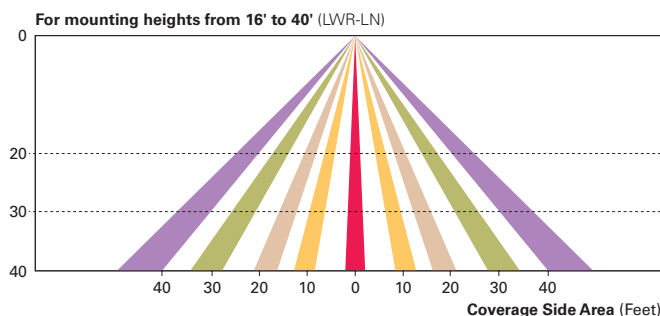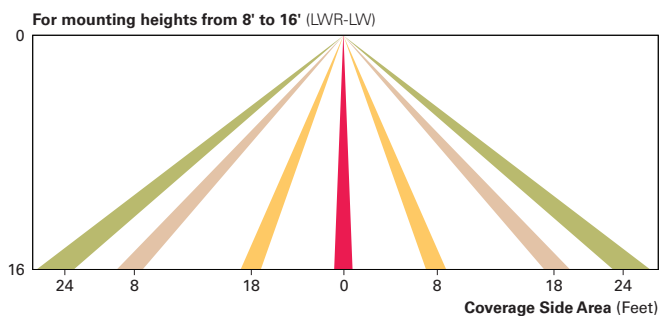

ORDERING INFORMATION

Sample Number: TT-C2-LED-E1-WQ-AP

Product Family	Lumen Package	Lamp Type	Voltage	Distribution	Mounting	Color
TT=TopTier ¹	C1=Nominal 3,500 Lumens C2=Nominal 4,500 Lumens C3=Nominal 6,000 Lumens C4=Nominal 7,500 Lumens C5=Nominal 9,500 Lumens C6=Nominal 12,000 Lumens	LED=Solid State Light Emitting Diodes	E1=Electrical (120-277V) 347=347V 480=480V ²	CQ=Concentrated MQ=Medium WQ=Wide RW=Rectangular Wide DL=Drive Lane / Type 4 ³	[BLANK]=Surface or Pendant Mount TMB=Trunnion Mount with Connection Box WM=Wall Mount DPM=Decorative Pendant Mount ⁴	[BLANK]=White AP=Grey BZ=Bronze BK=Black DP=Dark Platinum GM=Graphite Metallic
Options (Add as Suffix)				Accessories (Order Separately)		
8030=80 CRI / 3000K 7060=70 CRI / 6000K 7050=70 CRI / 5000K UPL=Uplight ^{5,6} 30L=30" Wire Leads ⁷ HA=50°C High Ambient ⁸ CG=Clear Glass ⁹ SG=Solite ⁹ Glass ¹⁰ TR=Tamper Resistant Hardware X=Driver Surge Protection Only 5LTD=Fifth Light DALI Drivers ^{7,11} IBP=Integral Battery Pack ¹² ICP=Integral Cold Weather Battery Pack ¹² MS/DIM-L08=Dimming Occupancy Sensor (<9' Mounting) ^{13,14} MS/DIM-L20=Dimming Occupancy Sensor (9' - 20' Mounting) ^{13,14} LWR-LW=LumaWatt Wireless Sensor, Wide Lens 8' - 16' Mounting Height ^{14,15} LWR-LN=LumaWatt Wireless Sensor, Narrow Lens 16' - 40' Mounting Height ^{14,15}				FSIR-100=Wireless Configuration Tool for Occupancy Sensor MA1252= Replacement 10kV Circuit Module TT/WG=Wire Guard TT/BG-XX=Bird Guard ^{16,17} DPMS36-XX=36" Pendant Mount Stem ¹⁶ DPMS48-XX=48" Pendant Mount Stem ¹⁶ DPMS96-XX=96" Pendant Mount Stem ¹⁶		

- NOTES:**
- DesignLights Consortium™ Qualified. Refer to www.designlights.org Qualified Products List under Family Models for details.
 - Only for use with 480V Wye systems. Per NEC, not for use with ungrounded systems, impedance grounded systems or corner grounded systems (commonly known as Three Phase Three Wire Delta, Three Phase High Leg Delta and Three Phase Corner Grounded Delta systems).
 - C1-C3 lumen packages only.
 - Order stem kit accessory.
 - Extended lead times apply.
 - Additional 17W. Provides 800 nominal lumens. Available in 3000K and 4000K with the C1-C4 lumen packages at a 25°C maximum ambient temperature. Not available with 347, 480, TMB, WM, HA, 5LTD, IBP or ICP.
 - Not available with TMB or DPM mounting.
 - HA not available with C5 and C6 lumen packages or 5LTD, IBP and ICP options.
 - Not available with CQ.
 - Standard with CQ, option available with WQ only.
 - Replace E1 with specific voltage (120, 208, 240, 277V available). Not available with C6 lumen package, HA, IBP, ICP or sensor options. Multiply published IES file by .95 when used with the C5 lumen package.
 - Replace E1 with specific voltage (120V and 277V available). 0°C minimum with IBP, -20°C minimum with ICP, 25°C maximum ambient temperature. Not available with WM, DPM, 5LTD or HA.
 - The FSIR-100 configuration tool is required to adjust parameters including high and low modes, sensitivity, time delay, cutoff and more. Consult your lighting representative at Eaton for more information.
 - Includes integral photocell.
 - LumaWatt wireless sensors are factory installed only requiring network components in appropriate quantities. See www.eaton.com/lighting for LumaWatt application information.
 - Specify color in place of XX.
 - Designed for use with pendant mounting only.