

CWP03 80W Wall Pack



NEW CWP03 Wall Packs

Ideal for security, warehouse, and entryway lighting

High impact polycarbonate optics
for precision beam control
and vandal resistance

Purpose-built
LED driver inside



LM80 tested
Lumiled chips

Heavy die-cast
aluminum body

TECHNICAL DATA



LIGHT SPECIFICATIONS

Lumens	11,410 lm
Efficacy	143.43 lm/W
CCT	5000K
CRI	80
Dimmable	0-10V
Warranty	10-year

APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLNTRVCX006C

ILLUMINANCE AT A DISTANCE

Illuminance at a Distance			
	Center Beam fc	Beam Width	
17.0ft	9.45 fc	43.1 ft	39.0 ft
34.0ft	2.36 fc	86.3 ft	78.0 ft
51.0ft	1.05 fc	129.4 ft	116.9 ft
68.0ft	0.59 fc	172.6 ft	155.9 ft
85.0ft	0.38 fc	215.7 ft	194.9 ft
102.0ft	0.26 fc	258.9 ft	233.9 ft

■ Vert. Spread: 103.5°
■ Horiz. Spread: 97.8°


ELECTRICAL

Wattage	80W
Voltage	120-277V
Power factor	0.90
THD	15%
Operating temp	-40° to 40°C


CONSTRUCTION

Housing	Aluminum / Polycarbonate
Colour	Bronze
IP rating	IP65
Weight	6.44 lbs
Carton qty	1

DIMENSIONS

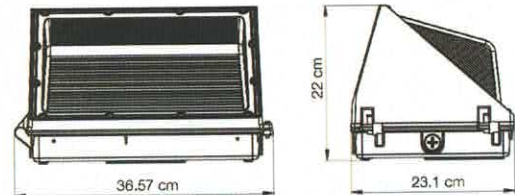

ISOCANDELA PLOT

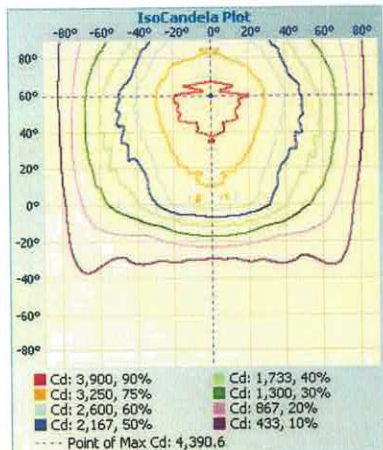

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com